


**Быстросействующие предохранители (uR)
характеристики gR и aR
от 5 до 2000 А**


Предохранители uR 690 В AC

14 x 51 и 22 x 58

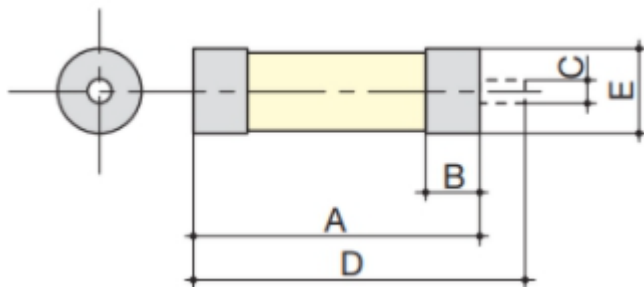


Размер	A	B	C	D	E
14 x 51	51	11	4	59	Ø 14,3
22 x 58	58	15	4	66	Ø 22,2

DIN 43653 и T/80

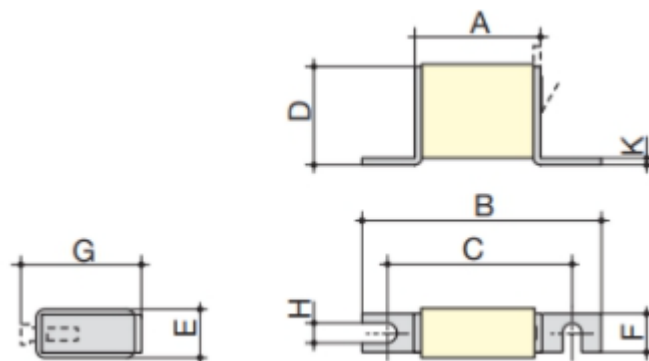


Размер	A	B	C	D	E	F	G	B	K
000	54	100	78	40	21	20	51	8	2
00	54	100	78	51	30	28	67	10	2

DIN 43620

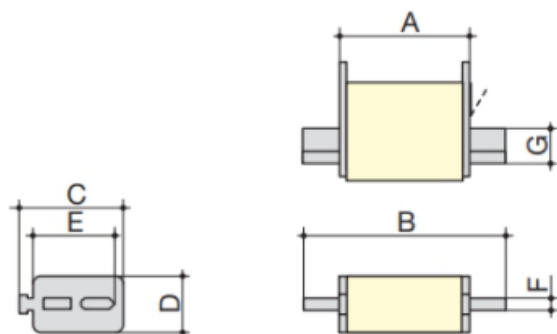


Размер	A	B	C	D	E	F	G
000	54	79	48	21	35	6	15
00	46	79	60	30	35	6	15
0	68	125	60	35	35	6	15
1	71	135	58	45	40	6	20
2	72	150	71	55	48	6	26
3	72	150	88	76	60	6	33

BT/60

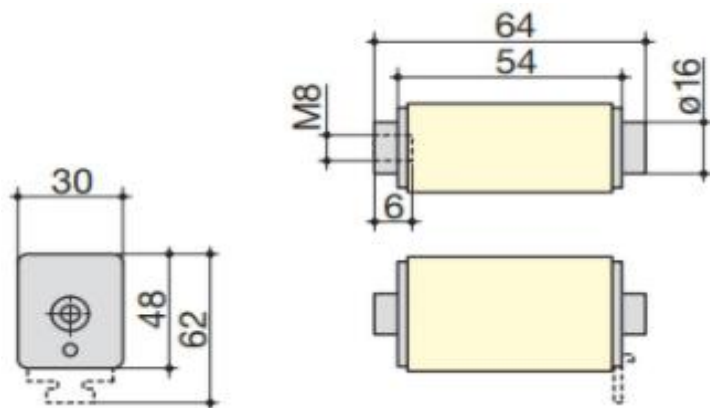

К/80 и К/110

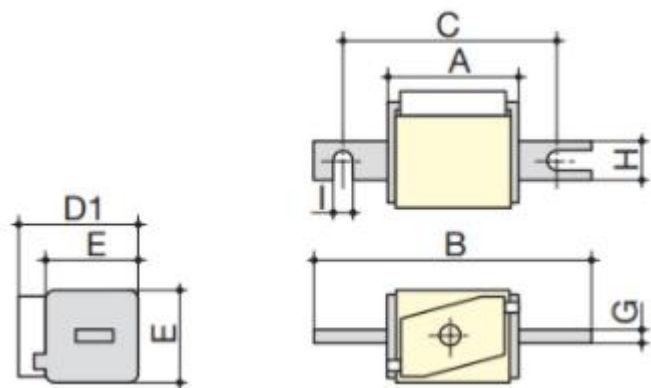


К/80

Размер	A	B	C	D1	E	G	H	I
1*	50	104	78	59	45	6	22	11
1	50	108	78	69	53	6	25	11
2	50	108	78	77	61	6	25	11
3	51	109	78	92	76	6	30	11

К/110


Размер	A	B	C	D1	E	G	H	I
1*	50	134	108	59	45	6	22	11
1	50	138	108	69	53	6	25	11
2	50	138	108	77	61	6	25	11
3	51	139	108	92	76	6	30	11

ЕК/76 - ЕК/86 - ЕК/91

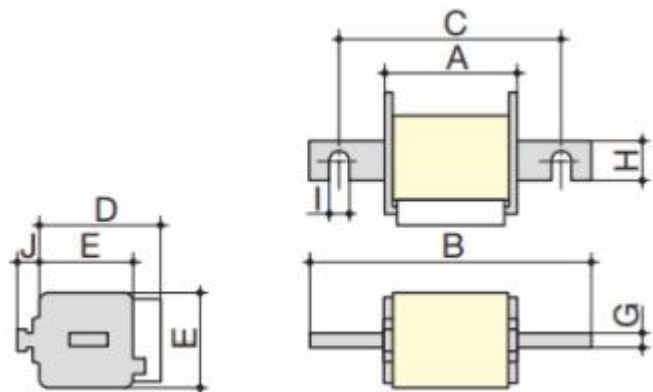

Размер	A	B	C	D	E	G	H	I	J
1*	50	102	76	59	45	6	18	9	13
1	50	111	86	69	53	6	25	11	11
2	50	126	91	77	61	6	30	13	12
3	51	126	91	92	76	6	36	13	11

БК/50

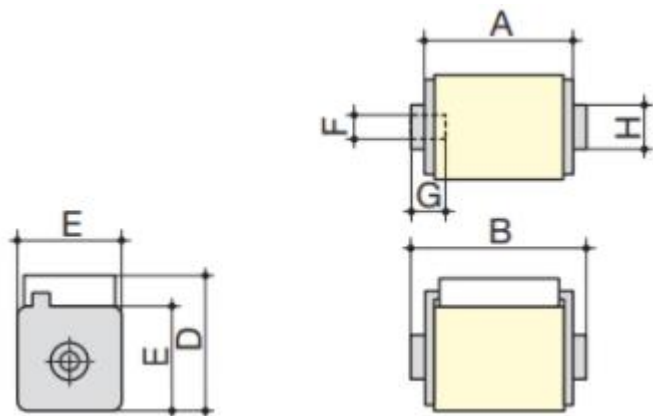


Размер	A	B	D	E	F	G	H
1*	50	51	59	45	M8	5	Ø 17
1	50	51	59	53	M8	8	Ø 20
2	50	51 ⁽¹⁾	77	61	M10	10	Ø 24
3	51	53 ⁽²⁾	92	76	M12	10	Ø 30

(1) B = 65 мм для тока 1100 - 1250 А.


(2) B = 65 мм для тока 1600 - 2000 А.

Предохранители uR 1250 В АС

К/110

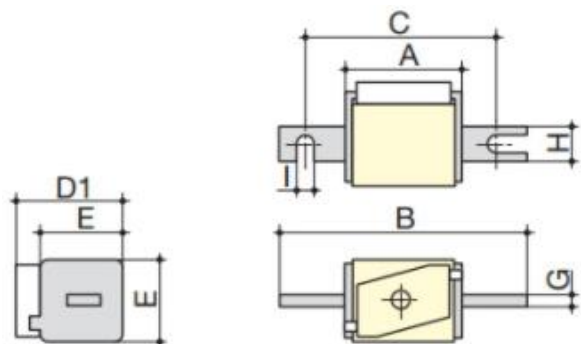

Размер	A	B	C	D1	E	G	H	I
1*	80	138	108	59	45	6	20	11
1	80	138	108	69	53	6	25	11
2	80	138	108	77	61	6	25	11
3	81	139	108	92	76	6	30	11

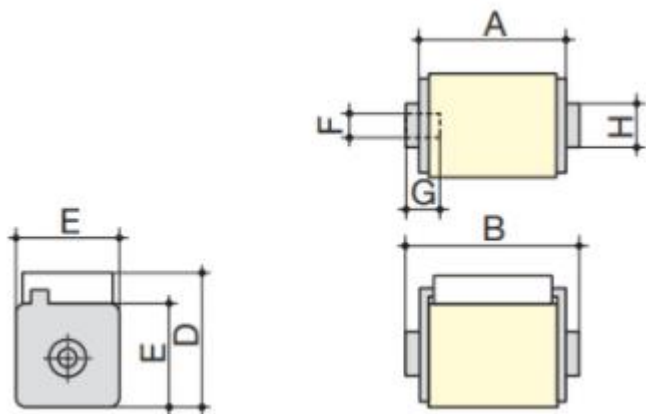БК/75 и БК/80**БК/75**

Размер	A	B	D	E	F	G	H
1*	74	75	59	45	M8	5	Ø 17
1	74	75	69	53	M8	8	Ø 20
2	74	75	77	61	M10	10	Ø 24
3	74	76	92	76	M12	10	Ø 30

БК/80

Размер	A	B	D	E	F	G	H
1*	80	81	59	45	M8	5	Ø 17
1	80	81	69	53	M8	8	Ø 20
2	80	81	77	61	M10	10	Ø 24
3	81	83	92	76	M12	10	Ø 30